












Каталог электродвигателей серий

АИС и АИС-Е

Т1А и MSB

Серия АИС и Т1А

Основные размеры:

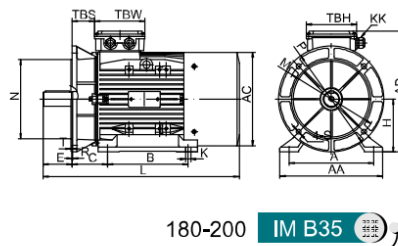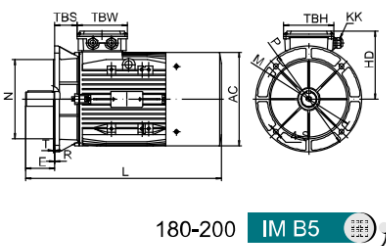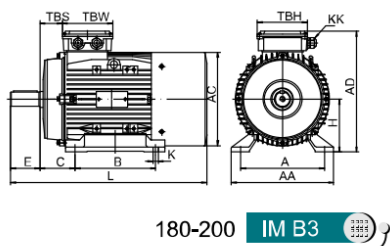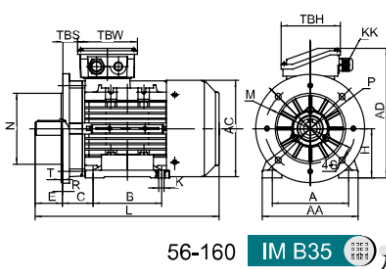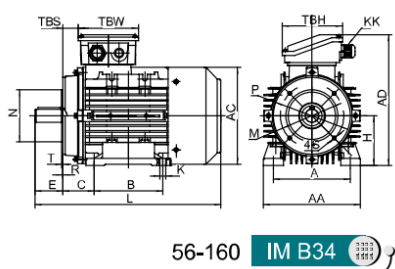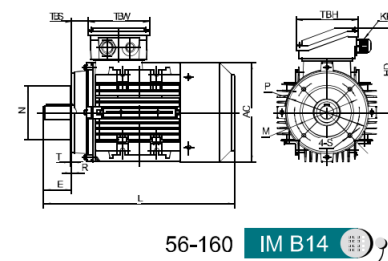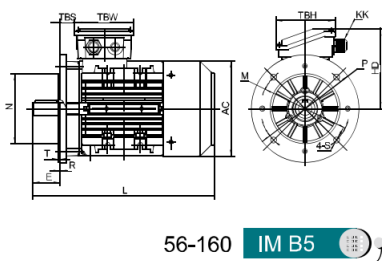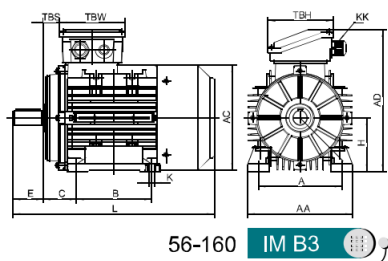

Габарит	Подшипники		KK	Лапы				Вал								Основные							
	Спереди	Сзади		H	A	B	C	D	E	F	G	K	SS	XX	ZZ	AA	AD	HD	AC	L	TBS	TBW	TBH
56	6201		1-M16*1.5	56	90	71	36	Φ9	20	3	7.2	6×9	M4	9	12	112	151	95	Φ110	195	16.5	83	83
63	6201		1-M16*1.5	63	100	80	40	Φ11	23	4	8.5	7×10	M4	10	14	124	170	107	Φ122	215	10	98	98
71	6202		1-M20*1.5	71	112	90	45	Φ14	30	5	11	7×10	M5	12	17	140	186	115	Φ138	245	16	98	98
80	6204		1-M20*1.5	80	125	100	50	Φ19	40	6	15.5	10×15	M6	16	21	160	214	134	Φ157	277	26.5	109	109
90S/L	6205		1-M20*1.5	90	140	100/125	56	Φ24	50	8	20	10×15	M8	19	25	176	235	145	Φ177	313/338	28.5	109	109
100	6206		2-M20*1.5	100	160	140	63	Φ28	60	8	24	12×16	M10	22	30	200	260	160	Φ199	376	32	118	118
112	6306	6206	2-M25*1.5	112	190	140	70	Φ28	60	8	24	12×16	M10	22	30	224	283	171	Φ220	397	33	118	118
132S/M	6308	6208	2-M25*1.5	132	216	140/178	89	Φ38	80	10	33	12×16	M12	28	37	260	323	191	Φ261	460/498	36.5	118	118
160M/L	6309	6209	2-M32*1.5	160	254	210/254	108	Φ42	110	12	37	15×21	M16	36	45	314	391	231	Φ314	616/660	64	148	148
180	6311	6211	2-M32*1.5	180	279	241/279	121	Φ48	110	14	42.5	15×25	M16	36	45	340	440	260	Φ368	730	73	190	190
200	6312	6212	2-M40*1.5	200	318	305	133	Φ55	110	16	49	19×29	M20	42	53	390	460	260	Φ368	745	85	190	190

Габарит	B5						B14						B5R						B14B					
	N	M	P	S	T	R	N	M	P	S	T	R	N	M	P	T	S	R	N	M	P	T	S	R
56	Φ80	Φ100	Φ120	Φ7	3	0	Φ50	Φ65	Φ80	M5	2.5	0												
63	Φ95	Φ115	Φ140	Φ10	3	0	Φ60	Φ75	Φ90	M5	2.5	0												
71	Φ110	Φ130	Φ160	Φ10	3.5	0	Φ70	Φ85	Φ105	M6	2.5	0	Φ95	Φ115	Φ140	3	Φ10	0	Φ95	Φ115	Φ140	3	M8	0
80	Φ130	Φ65	Φ200	Φ12	3.5	0	Φ80	Φ100	Φ120	M6	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
90S/L	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ95	Φ115	Φ140	M8	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
100	Φ180	Φ215	Φ250	Φ15	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0
112	Φ180	Φ215	Φ250	Φ15	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0
132S/M	Φ230	Φ265	Φ300	Φ15	4	0	Φ130	Φ165	Φ200	M10	3.5	0	Φ180	Φ215	Φ250	4	Φ15	0	Φ180	Φ215	Φ250	4	M12	0
160M/L	Φ250	Φ300	Φ350	Φ19	5	0	Φ180	Φ215	Φ250	M12	4	0												
180	Φ250	Φ300	Φ350	Φ19	5	0																		
200	Φ300	Φ350	Φ400	Φ19	5	0																		

Технические характеристики


Тип	Мощ- ность	Сила тока (А)			Сила тока (А)			Сила тока (А)			Ско- рость (r/min)	КПД (%)	cos φ	T _{start} /T _n	T _{max} /T _n	T _{min} /T _n	I ₂ /I ₁	Шум дБ(А)	Вес (kg)	М.И.н. kg*м²
		220V	380V	660V	230V	400V	690V	240V	415V	720V										
561-2	0.09	0.62	0.36	0.21	0.59	0.34	0.20	0.57	0.33	0.19	2710	53	0.72	2.2	2.3	2	4	58	2.8	0.000102
562-2	0.12	0.72	0.42	0.24	0.68	0.39	0.23	0.66	0.38	0.22	2700	61	0.72	2.2	2.3	2	4	58	3.2	0.000128
563-2	0.18	1.00	0.58	0.33	0.95	0.55	0.32	0.92	0.53	0.31	2710	63	0.75	2.2	2.4	1.6	6	61	3.5	0.000142
631-2	0.18	1.00	0.58	0.33	0.95	0.55	0.32	0.92	0.53	0.31	2710	63	0.75	2.2	2.4	1.6	6	61	3.7	0.000150
632-2	0.25	1.30	0.75	0.43	1.23	0.71	0.41	1.19	0.69	0.40	2710	65	0.78	2.2	2.4	1.6	6	61	4.2	0.000171
633-2	0.37	1.92	1.11	0.64	1.82	1.05	0.61	1.76	1.02	0.59	2710	65	0.78	2.2	2.4	1.6	6	62	4.7	0.000203
711-2	0.37	1.76	1.02	0.59	1.67	0.97	0.56	1.61	0.93	0.54	2730	70	0.79	2.2	2.4	1.6	6	64	5.34	0.000314
712-2	0.55	2.58	1.49	0.86	2.45	1.42	0.82	2.36	1.36	0.79	2760	71	0.79	2.2	2.4	1.6	6	64	6.14	0.000384
713-2	0.75	3.34	1.93	1.11	3.18	1.83	1.06	3.06	1.77	1.02	2730	72	0.82	2.2	2.4	1.5	6	65	7.1	0.000475
801-2	0.75	3.44	1.98	1.15	3.26	1.88	1.09	3.15	1.82	1.05	2860	69.2	0.83	2.1	2.5	1.5	5.7	67	8.15	0.000896
802-2	1.1	4.41	2.55	1.47	4.19	2.42	1.40	4.04	2.33	1.35	2870	79	0.83	2.6	2.8	1.8	6.5	67	9.7	0.001124
803-2	1.5	5.87	3.39	1.96	5.58	3.22	1.86	5.38	3.10	1.79	2870	81	0.83	2.7	2.8	1.8	6.8	70	11.2	0.001351
90S-2	1.5	5.94	3.43	1.98	5.65	3.26	1.88	5.44	3.14	1.81	2880	80	0.83	2.3	2.8	1.4	6.6	72	12.3	0.001856
90L1-2	2.2	8.25	4.77	2.75	7.84	4.53	2.61	7.56	4.36	2.52	2880	83.5	0.84	2.6	2.7	1.8	7.1	72	14.9	0.002306
90L2-2	3	10.8	6.24	3.60	10.3	5.92	3.42	9.89	5.71	3.30	2900	86	0.85	2.9	3	1.9	8.1	74	17.4	0.002966
100L1-2	3	11.3	6.54	3.77	10.8	6.21	3.59	10.4	5.99	3.46	2900	83	0.84	2.7	3.2	2.1	7.7	76	20.1	0.003776
100L2-2	4	15.0	8.67	5.00	14.3	8.23	4.75	13.7	7.93	4.58	2890	84.5	0.83	3.1	3.6	2.8	8.1	77	23	0.004664
100L3-2	5.5	18.7	10.8	6.23	17.8	10.25	5.92	17.1	9.88	5.70	2900	88	0.88	3.3	3.6	2.5	10.1	78	26	0.005907
112M1-2	4	14.2	8.2	4.75	13.5	7.81	4.51	13.0	7.53	4.34	2910	85	0.87	2.8	3.6	1.7	9.2	77	26.3	0.006311
112M2-2	5.5	19.0	11.0	6.34	18.1	10.4	6.02	17.4	10.1	5.80	2900	86.5	0.88	3	3.8	2.2	9.8	78	31.2	0.007796
112M3-2	7.5	25.8	14.9	8.59	24.5	14.1	8.16	23.6	13.6	7.87	2910	88	0.87	3.8	4.2	2.7	10.3	80	37	0.009833
132S1-2	5.5	19.7	11.4	6.57	18.7	10.8	6.24	18.0	10.4	6.02	2890	84.4	0.87	2.2	2.8	2.2	6.8	80	37.6	0.012058
132S2-2	7.5	25.8	14.9	8.59	24.5	14.1	8.16	23.6	13.6	7.87	2890	88	0.87	2.7	3.2	2.5	8.2	80	43	0.015212
132M1-2	9.2	30.6	17.6	10.2	29.0	16.8	9.68	28.0	16.2	9.33	2910	88	0.9	3.1	3.8	1.7	9.7	81	48.4	0.017834
132M2-2	11	36.5	21.1	12.2	34.7	20.0	11.6	33.5	19.3	11.2	2920	89	0.89	3.3	4	1.8	10.7	83	54.2	0.020357
132M3-2	15	50.4	29.1	16.8	47.9	27.7	16.0	46.2	26.7	15.4	2940	91	0.86	4	4.5	2.5	14	86	72	0.028557
160M1-2	11	38.3	22.1	12.8	36.4	21.0	12.1	35.1	20.2	11.7	2940	90	0.84	2.6	3.1	1.5	7.9	86	72	0.044380
160M2-2	15	51.4	29.7	17.1	48.9	28.2	16.3	47.1	27.2	15.7	2950	90.3	0.85	2.8	3.3	1.4	8.6	86	82	0.055805
160L1-2	18.5	62.9	36.3	21.0	59.8	34.5	19.9	57.6	33.3	19.2	2950	91	0.85	3	3.4	1.6	9.3	86	94.1	0.065593
160L2-2	22	73.7	42.6	24.6	70.0	40.4	23.4	67.5	39.0	22.5	2950	91.3	0.86	3.2	3.5	1.7	9.9	91	104.5	0.077018
561-4	0.06	0.56	0.33	0.19	0.54	0.31	0.18	0.52	0.30	0.17	1360	50	0.56	2.3	2.4	2	4	50	2.9	0.000190
562-4	0.09	0.77	0.45	0.26	0.73	0.42	0.24	0.71	0.41	0.24	1360	52	0.59	2.3	2.4	2	4	50	3.3	0.000240
563-4	0.12	0.95	0.55	0.32	0.90	0.52	0.30	0.87	0.50	0.29	1360	52	0.64	2.2	2.4	2	4	52	3.7	0.000265
631-4	0.12	0.95	0.55	0.32	0.90	0.52	0.30	0.87	0.50	0.29	1360	52	0.64	2.2	2.4	2	4	52	3.7	0.000273
632-4	0.18	1.28	0.74	0.43	1.21	0.70	0.40	1.17	0.68	0.39	1310	57	0.65	2.2	2.4	2	4	52	4.4	0.000338
633-4	0.25	1.66	0.96	0.55	1.58	0.91	0.53	1.52	0.88	0.51	1340	60	0.66	2.2	2.2	2	4	54	5	0.000408
711-4	0.25	1.52	0.88	0.51	1.45	0.84	0.48	1.39	0.81	0.46	1350	60	0.72	2.2	2.4	1.7	6	55	5.06	0.000561
712-4	0.37	2.02	1.17	0.67	1.92	1.11	0.64	1.85	1.07	0.62	1370	65	0.74	2.2	2.4	1.7	6	55	5.96	0.000714
713-4	0.55	2.92	1.69	0.97	2.78	1.60	0.93	2.68	1.55	0.89	1380	66	0.75	2.2	2.4	1.7	6	57	7.06	0.000919
801-4	0.55	2.64	1.53	0.88	2.51	1.45	0.84	2.42	1.40	0.81	1420	73	0.75	2	2.3	1.6	4.8	57	8.3	0.001453
802-4	0.75	3.39	1.96	1.13	3.22	1.86	1.08	3.11	1.79	1.04	1410	76.5	0.76	2	2.4	1.7	5	58	9.8	0.001690
803-4	1.1	4.91	2.84	1.64	4.67	2.70	1.56	4.50	2.60	1.50	1390	77.5	0.76	2.3	2.4	2	5	61	11.2	0.002166
90S-4	1.1	4.88	2.82	1.63	4.64	2.68	1.55	4.47	2.58	1.49	1400	78	0.76	2.1	2.3	1.9	5	61	12.3	0.002675
90L1-4	1.5	6.25	3.61	2.08	5.94	3.43	1.98	5.72	3.30	1.91	1410	81	0.78	2.6	2.4	2.1	5.7	61	15.1	0.003519

90L2-4	2.2	8.72	5.03	2.91	8.28	4.78	2.76	7.98	4.61	2.66	1420	83	0.8	2.7	2.3	2.1	6.2	64	17.78	0.004685
100L1-4	2.2	9.42	5.44	3.14	8.95	5.16	2.98	8.62	4.98	2.87	1430	80.9	0.76	2.2	2.8	1.9	6	64	20	0.006775
100L2-4	3	11.4	6.58	3.80	10.8	6.25	3.61	10.4	6.02	3.48	1430	84.5	0.82	2.5	2.8	2.1	6.7	64	24	0.008424
100L3-4	4	16.1	9.28	5.36	15.3	8.81	5.09	14.7	8.49	4.90	1430	84	0.78	2.7	3	2.3	6.9	65	28.2	0.010733
112M1-4	4	15.8	9.11	5.26	15.0	8.66	5.00	14.5	8.34	4.82	1440	85.5	0.78	2.3	3.3	2.1	7.8	65	29.8	0.013228
112M2-4	5.5	21.7	12.5	7.24	20.6	11.9	6.88	19.9	11.5	6.63	1450	86.5	0.77	3.4	3.5	2.6	8.6	71	36	0.016839
132S-4	5.5	20.5	11.9	6.84	19.5	11.3	6.50	18.8	10.9	6.26	1450	86	0.82	1.8	2.9	1.7	7.1	71	42	0.028012
132M1-4	7.5	28.2	16.3	9.40	26.8	15.5	8.93	25.8	14.9	8.61	1450	87.5	0.8	2.9	3.3	1.9	8.4	71	52.6	0.037145
132M2-4	9.2	33.8	19.5	11.3	32.1	18.5	10.7	30.9	17.9	10.3	1450	88.5	0.81	3.1	3.4	1.7	8.9	74	55	0.043597
132M3-4	11	40.0	23.1	13.3	38.0	21.9	12.7	36.6	21.1	12.2	1450	89.4	0.81	3.5	3.5	1.7	9.4	75	64	0.051339
160M-4	11	40.7	23.5	13.6	38.6	22.3	12.9	37.2	21.5	12.4	1460	89	0.8	2.3	2.8	1.3	6.8	75	74	0.080254
160L1-4	15	53.2	30.7	17.7	50.5	29.2	16.8	48.7	28.1	16.2	1460	90.5	0.82	2.4	2.6	1.4	7.5	75	90.3	0.105640
160L2-4	18.5	64.5	37.3	21.5	61.3	35.4	20.4	59.1	34.1	19.7	1460	90.9	0.83	2.4	2.5	1.4	7.6	78	104	0.127619
160L3-4	22	77.2	44.6	25.8	73.4	42.4	24.5	70.7	40.8	23.6	1460	91.4	0.82	2.8	2.7	1.5	8.8	80	118.5	0.149598
Тип	Мощность	Сила тока (А)			Сила тока (А)			Сила тока (А)			Скорость (r/min)	КПД (%)	cos φ	T _{start} /T _n	T _{max} /T _n	T _{min} /T _n	I _{st} /I _n	Шум дБ(А)	Вес (kg)	М.Ин. kg*м²
		220V	380V	660V	230V	400V	690V	240V	415V	720V										
631-6	0.09	0.92	0.53	0.31	0.88	0.51	0.29	0.85	0.49	0.28	840	42	0.61	2	2	1.5	3.5	50	4.2	0.000418
632-6	0.12	1.13	0.65	0.38	1.08	0.62	0.36	1.04	0.60	0.35	850	45	0.62	2	2	1.5	3.5	50	4.5	0.000517
711-6	0.18	1.28	0.74	0.43	1.22	0.70	0.41	1.17	0.68	0.39	880	56	0.66	1.6	1.7	1.5	4	52	5.6	0.000841
712-6	0.25	1.59	0.92	0.53	1.51	0.87	0.50	1.46	0.84	0.49	900	59	0.7	2.1	2.2	1.5	4	52	6	0.000965
713-6	0.37	2.31	1.34	0.77	2.20	1.27	0.73	2.12	1.22	0.71	890	61	0.69	2	2.1	1.5	4	54	6.8	0.001150
801-6	0.37	2.42	1.40	0.81	2.30	1.33	0.77	2.21	1.28	0.74	910	61	0.66	1.9	2.2	1.8	3.2	56	8	0.001596
802-6	0.55	3.40	1.96	1.13	3.23	1.86	1.08	3.11	1.80	1.04	910	65.5	0.65	2.1	2.3	1.9	3.5	56	9.1	0.002041
803-6	0.75	4.06	2.34	1.35	3.85	2.23	1.28	3.72	2.14	1.24	910	70.5	0.69	2.1	2.2	1.9	3.8	58	10.6	0.002634
90S-6	0.75	4.06	2.34	1.35	3.86	2.23	1.29	3.72	2.15	1.24	940	71.5	0.68	1.8	2.2	1.5	4.1	59	11.5	0.003266
90L-6	1.1	5.97	3.45	1.99	5.67	3.27	1.89	5.46	3.15	1.82	930	73.5	0.66	1.9	2.3	1.8	4.1	59	14.5	0.004281
90L2-6	1.5	7.63	4.40	2.54	7.25	4.18	2.42	6.98	4.03	2.33	930	75	0.69	2	2.2	1.9	4.3	61	15.5	0.005487
100L-6	1.5	7.43	4.29	2.48	7.06	4.08	2.35	6.80	3.93	2.27	940	77	0.69	1.9	2.6	1.8	4.6	61	18.7	0.007543
100L2-6	2.2	9.71	5.61	3.24	9.22	5.33	3.07	8.89	5.13	2.96	940	79.5	0.75	2	2.3	1.8	5.1	64	22.8	0.009935
112M1-6	2.2	10.6	6.11	3.53	10.1	5.80	3.35	9.69	5.59	3.23	945	79.3	0.69	1.9	2.3	1.8	4.8	64	24.5	0.013950
112M2-6	3	14.1	8.16	4.71	13.4	7.75	4.47	12.9	7.47	4.31	950	81	0.69	1.9	2.8	1.8	5	64	28.5	0.017675
132S-6	3	13.3	7.67	4.43	12.6	7.29	4.21	12.2	7.03	4.06	960	82.5	0.72	1.9	2.5	1.4	5.7	64	36.4	0.030457
132M1-6	4	17.1	9.85	5.69	16.2	9.36	5.40	15.6	9.02	5.21	965	84.5	0.73	2	2.6	1.5	5.9	68	42.2	0.037251
132M2-6	5.5	23.5	13.6	7.84	22.3	12.9	7.45	21.5	12.4	7.18	950	85.5	0.72	2.1	2.7	1.6	6.2	68	51.4	0.048966
132M3-6	7.5	30.2	17.5	10.1	28.7	16.6	9.58	27.7	16.0	9.23	965	87	0.75	2.7	2.9	2	7.3	68	62.6	0.062355
160M-6	7.5	30.2	17.5	10.1	28.7	16.6	9.58	27.7	16.0	9.23	965	87	0.75	2.4	2.9	1.7	6.7	68	68.3	0.086226
160L-6	11	43.2	24.9	14.4	41.1	23.7	13.7	39.6	22.8	13.2	965	87	0.77	2.5	2.7	1.5	6.9	73	86	0.116874
711-8	0.09	0.97	0.56	0.32	0.92	0.53	0.31	0.88	0.51	0.29	680	43	0.57	2.4	2.5	2.3	2.5	50	5.6	0.000717
712-8	0.12	1.14	0.66	0.38	1.08	0.62	0.36	1.04	0.60	0.35	690	49.5	0.56	2.7	2.8	2.6	3	50	6	0.000841
801-8	0.18	1.48	0.86	0.49	1.41	0.81	0.47	1.36	0.79	0.45	690	55	0.58	2.2	2.4	2	3	52	8.3	0.002021
802-8	0.25	1.94	1.12	0.65	1.84	1.06	0.61	1.78	1.03	0.59	690	58.5	0.58	2.3	2.4	2	3.1	52	9.3	0.002323
90S-8	0.37	2.58	1.49	0.86	2.45	1.41	0.82	2.36	1.36	0.79	710	64	0.59	1.9	2.3	1.7	3.3	56	11.38	0.003266
90L-8	0.55	3.84	2.22	1.28	3.65	2.11	1.22	3.52	2.03	1.17	705	65	0.58	1.9	2.3	1.7	3.4	56	14	0.004281
90L2-8	0.75	4.69	2.71	1.56	4.45	2.57	1.49	4.29	2.48	1.43	700	69	0.61	1.8	2.1	1.8	3.5	59	15.5	0.004884
100L1-8	0.75	4.43	2.56	1.48	4.21	2.43	1.40	4.06	2.34	1.35	685	68.5	0.65	1.9	1.8	2.2	3.6	59	17.6	0.006346
100L2-8	1.1	6.09	3.52	2.03	5.79	3.34	1.93	5.58	3.22	1.86	690	72	0.66	1.9	2.1	1.8	3.5	59	20	0.008340
112M-8	1.5	7.87	4.54	2.62	7.48	4.32	2.49	7.21	4.16	2.40	700	76	0.66	1.8	2.3	1.8	4	61	25.3	0.013950


132S-8	2.2	10.6	6.13	3.54	10.1	5.83	3.36	9.73	5.62	3.24	715	79	0.69	1.9	2.4	1.7	4.9	64	39.6	0.032131
132M-8	3	13.9	8.04	4.64	13.2	7.64	4.41	12.7	7.36	4.25	715	81	0.7	2	2.5	1.8	5.1	64	47.4	0.040598
160M1-8	4	18.3	10.6	6.11	17.4	10.1	5.81	16.8	9.70	5.60	715	82	0.7	1.8	2.3	1.6	4.6	68	59.8	0.071036
160M2-8	5.5	24.8	14.3	8.25	23.5	13.6	7.84	22.7	13.1	7.56	710	83.5	0.7	1.9	2.4	1.8	4.8	68	69	0.086226
160L-8	7.5	33.0	19.0	11.0	31.3	18.1	10.4	30.2	17.4	10.1	715	85.5	0.7	2.5	2.8	2	5.7	68	84.8	0.113076

Серия АИС-Е и MSB


Основные размеры:

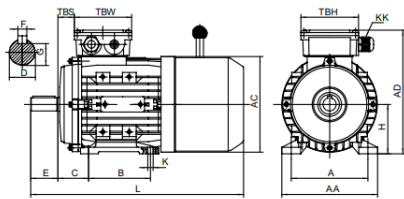


IM B3




IM B5

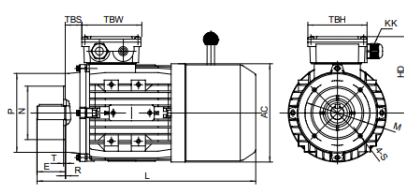


IM B14

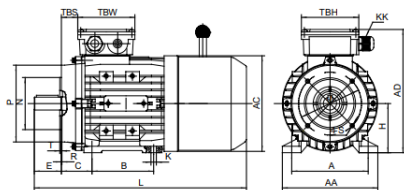

IM B34



IM B35



Габарит	Лапы				Вал								Основные							
	Н	А	В	С	Д	Е	F	G	К	SS	XX	ZZ	AA	AD	HD	AC	L	TBS	TBW	TBH
56	56	90	71	36	Φ9	20	3	7.2	5.8*8.8	M4	9	12	110	152	96	Φ110	233	14	88	88
63	63	100	80	40	Φ11	23	4	8.5	7*10	M4	10	14	124	169	106	Φ121	265	14	94	94
71 ^{☆☆}	71	112	90	45	Φ14	30	5	11	7*10	M5	12	17	140	184	113	Φ139	287/301	20	94	94
80	80	125	100	50	Φ19	40	6	15.5	10*13	M6	16	21	160	211	131	Φ156	340	27	105	105
90S	90	140	100	56	Φ24	50	8	20	10*13	M8	19	25	175	228	138	Φ175	356	30	105	105
90L1/L2	90	140	125	56	Φ24	50	8	20	10*13	M8	19	25	175	228	138	Φ175	381/411	30	105	105
100 ^{☆☆}	100	160	140	63	Φ28	60	8	24	12*15	M10	22	30	200	248	148	Φ196	434/452	26	105	105
112	112	190	140	70	Φ28	60	8	24	12*15	M10	22	30	230	278	166	Φ221	465	32	112	112
132S	132	216	140	89	Φ38	80	10	33	12*15	M12	28	37	255	316	184	Φ256	518	38	112	112
132M/L	132	216	178	89	Φ38	80	10	33	12*15	M12	28	37	255	316	184	Φ256	556/582	38	112	112
160M/L	160	254	210/254	108	Φ42	110	12	37	15*19	M16	36	45	314	282	222	Φ313	701	64	143	143

[illegible]

Параметры тормоза:

Габарит	Тип тормоза	Момент тормоза (Нм)	Мощность тормоза (В)	Задержка при включении двигателя (мс)	Время торможения (мс)	Задержка при выключении двигателя (мс)
56-71	06	4	20	15	30	40
80	08	8	25	15	32	50
90	10	16	30	25	45	69
100	12	32	40	26	56	108
112	14	60	50	27	57	190
132	16	80	55	30	60	200
160	18	150	85	35	78	260

Технические характеристики:

Габарит	Мощность (kW)	Сила тока (A)			Сила тока (A)			Сила тока (A)			Скорость (r/min)	КДП			cos φ	Tst/Tn	Tmax/Tn	Tmin/Tn	Ist/In	Шум dB(A)
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%						
631-2	0.18	0.92	0.53	0.31	0.88	0.51	0.29	0.85	0.49	0.28	2780	66.5	64.2	56.8	0.77	2.3	2.5	2.4	4.1	61
632-2	0.25	1.19	0.69	0.40	1.14	0.65	0.38	1.09	0.63	0.36	2780	69.8	68.8	62.8	0.79	2.6	2.5	2.4	4.3	61
633-2	0.37	1.72	1.00	0.57	1.65	0.95	0.55	1.58	0.91	0.53	2750	71.4	71.2	65.9	0.79	2.8	2.6	2.6	4.7	62
711-2	0.37	1.70	0.99	0.57	1.63	0.94	0.54	1.56	0.90	0.52	2830	71.3	70.4	65.2	0.8	2.8	2.9	2	5.9	64
712-2	0.55	2.52	1.46	0.84	2.41	1.39	0.80	2.31	1.34	0.77	2815	71.6	71	66.1	0.8	2.7	2.7	1.8	6	64
713-2	0.75	3.25	1.88	1.08	3.11	1.79	1.04	2.98	1.72	0.99	2820	73.8	73.9	70.3	0.82	3.0	3.0	2.0	6.6	65
801-2	0.75	3.15	1.83	1.05	3.02	1.73	1.01	2.89	1.67	0.96	2830	75.2	75.6	72.2	0.83	3	2.8	2	6.2	67
802-2	1.1	4.40	2.55	1.47	4.21	2.42	1.40	4.04	2.33	1.35	2840	79	79.8	77.7	0.83	2.6	3.1	2.6	6.1	67
803-2	1.5	5.70	3.30	1.90	5.46	3.14	1.82	5.23	3.02	1.74	2820	81.2	82.5	81.3	0.85	3.2	3	2.5	7.2	70
90S-2	1.5	5.73	3.32	1.91	5.48	3.15	1.83	5.25	3.04	1.75	2850	80.8	81.2	78.9	0.85	2.8	3.3	2.6	7.7	72
90L1-2	2.2	8.19	4.74	2.73	7.84	4.51	2.61	7.51	4.34	2.50	2860	82.9	83.4	81.4	0.85	3.7	3.9	3.3	8.8	72
90L2-2	3	11.1	6.43	3.70	10.6	6.11	3.54	10.2	5.89	3.39	2830	82.4	83.5	82.3	0.86	4.4	4.2	3.5	8	74
100L1-2	3	10.9	6.32	3.64	10.4	6.00	3.48	10.0	5.78	3.33	2875	83.9	84.5	83	0.86	2.8	3.2	2	8.1	76
100L2-2	4	13.8	7.99	4.60	13.2	7.59	4.40	12.6	7.31	4.22	2870	85.5	86.5	85.8	0.89	3.2	3.4	2.2	8.8	77
112M-2	4	13.2	7.63	4.40	12.6	7.25	4.20	12.1	6.99	4.03	2870	85.6	87.0	86.8	0.93	2.6	2.85	1.75	8.1	77
112L-2	5.5	18.0	10.4	6.00	17.2	9.9	5.74	16.5	9.5	5.50	2890	87.1	88	87.6	0.92	3.1	3.3	2	9.4	78
132S1-2	5.5	18.5	10.7	6.17	17.7	10.2	5.90	17.0	9.8	5.65	2900	86.6	87.4	86.5	0.90	2.25	3.1	1.5	7.9	80
132S2-2	7.5	24.6	14.2	8.19	23.5	13.5	7.84	22.5	13.0	7.51	2900	88.0	88.8	88.3	0.91	2.4	3.25	1.5	8.5	80
132M1-2	9.2	30.8	17.8	10.3	29.5	17.0	9.83	28.3	16.3	9.42	2930	88	88	86.4	0.89	2	2.2	1.2	7.5	81
132M2-2	11	36.3	21.0	12.1	34.7	20.0	11.6	33.3	19.2	11.1	2930	88.4	88.6	87.5	0.9	2	2.2	1.2	7.5	83
160M1-2	11	36.4	21.1	12.1	34.8	20.0	11.6	33.4	19.3	11.1	2920	88.8	89.4	88.6	0.89	2.6	2.95	1.85	7.1	86
160M2-2	15	49.3	28.5	16.4	47.2	27.1	15.7	45.2	26.1	15.1	2910	89.1	90.0	89.6	0.90	2.2	2.8	1.8	6.4	86
160L-2	18.5	59.3	34.4	19.8	56.8	32.6	18.9	54.4	31.5	18.1	2930	90.3	90.9	90.3	0.91	2.9	3.05	1.65	8.4	86
631-4	0.12	0.89	0.51	0.30	0.85	0.49	0.28	0.81	0.47	0.27	1390	58.5	54.3	45.6	0.61	2.65	2.8	2.7	3.2	52
632-4	0.18	1.15	0.67	0.38	1.10	0.63	0.37	1.06	0.61	0.35	1365	64.2	62.5	55.9	0.64	2.8	2.55	2.4	3.6	52
633-4	0.25	1.45	0.84	0.48	1.39	0.80	0.46	1.33	0.77	0.44	1370	68.3	67.5	62.1	0.66	2.7	2.7	2.4	3.9	54
711-4	0.25	1.38	0.80	0.46	1.32	0.76	0.44	1.27	0.73	0.42	1395	65.1	63.1	55.8	0.73	2	2.15	1.6	4.2	55
712-4	0.37	1.90	1.10	0.63	1.82	1.05	0.61	1.74	1.01	0.58	1390	68.6	68.2	62.9	0.74	2.25	2.35	1.95	4.6	55
713-4	0.55	2.81	1.63	0.94	2.69	1.54	0.90	2.57	1.49	0.86	1390	71.9	71.6	66.8	0.72	2.8	2.8	2.4	4.8	57
801-4	0.55	2.74	1.59	0.91	2.62	1.51	0.87	2.51	1.45	0.84	1400	70.9	70.5	65.5	0.74	2.25	2.55	1.95	4.9	58
802-4	0.75	3.36	1.94	1.12	3.21	1.85	1.07	3.08	1.78	1.03	1390	74.4	76.0	73.9	0.79	2.5	2.55	2.05	5.4	58
803-4	1.1	4.90	2.84	1.63	4.69	2.69	1.56	4.49	2.60	1.50	1390	74.6	75.7	73.3	0.79	2.9	2.9	2.4	5.9	60
90S-4	1.1	4.90	2.83	1.63	4.68	2.69	1.56	4.49	2.60	1.50	1400	75.5	76.7	74.4	0.78	2.9	2.7	2.15	6	61
90L1-4	1.5	6.48	3.75	2.16	6.20	3.56	2.07	5.94	3.44	1.98	1410	79.6	80.2	78.0	0.76	3.4	3.3	2.7	6.9	61
90L2-4	2.2	9.76	5.65	3.25	9.33	5.37	3.11	8.94	5.17	2.98	1410	78.9	79.4	77	0.75	3.8	2.6	3.2	7.2	63
100L1-4	2.2	8.71	5.05	2.90	8.34	4.79	2.78	7.99	4.62	2.66	1420	82.0	83.3	82.3	0.81	2.4	2.7	2.15	6.3	64
100L2-4	3	11.5	6.64	3.82	11.0	6.31	3.66	10.5	6.08	3.51	1430	83.7	84.8	83.8	0.82	2.6	3	2.15	6.8	64
100L3-4	4	15.2	8.80	5.07	14.5	8.36	4.85	13.9	8.06	4.65	1430	84.2	85.5	85.3	0.82	2.2	2.3	1.5	7	65

112M-4	4	14.9	8.60	4.95	14.2	8.17	4.74	13.6	7.88	4.54	1440	84.7	86.0	85.4	0.83	2.5	2.9	2.05	7.1	65
112L-4	5.5	20.4	11.8	6.81	19.5	11.2	6.51	18.7	10.8	6.24	1435	85.9	87.1	86.6	0.82	2.5	2.95	2.2	7.2	68
132S-4	5.5	19.6	11.4	6.54	18.76	10.8	6.25	18.0	10.4	5.99	1445	86.4	87.8	87.7	0.85	2.15	2.85	1.75	7.5	71
132M-4	7.5	25.9	15.0	8.62	24.7	14.2	8.24	23.7	13.7	7.90	1450	87.6	88.8	88.5	0.87	2.1	2.9	1.65	8.6	71
132L1-4	9.2	31.3	18.1	10.4	30.0	17.2	10.0	28.7	16.6	9.6	1450	88.6	89.5	89.1	0.87	2.8	2.4	2	8.4	74
132L2-4	11	37.3	21.6	12.4	35.6	20.5	11.9	34.2	19.8	11.4	1450	90.1	91.1	91	0.86	3	2.5	2	8.9	74
160M-4	11	39.7	23.0	13.2	37.9	21.8	12.6	36.4	21.0	12.1	1450	87.7	89.6	90.3	0.83	2.05	2.25	1.55	6.1	75
160L1-4	15	51.9	30.1	17.3	49.7	28.5	16.6	47.6	27.5	15.9	1455	88.7	90.0	90.2	0.86	2.2	2.45	1.4	7.3	75
160L2-4	18.5	63.1	36.5	21.0	60.4	34.7	20.1	57.9	33.5	19.3	1460	90.5	91	90.6	0.85	2.2	2.2	1.4	7.5	78
Габарит	Мощность (kW)	Сила тока (A)			Сила тока (A)			Сила тока (A)			Скорость (r/min)	КДП			cos φ	Tst/Tn	Tmax/Tn	Tmin/Tn	Ist/In	Шум dB(A)
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%						
631-6	0.09	0.75	0.44	0.25	0.72	0.41	0.24	0.69	0.40	0.23	890	50.7	47.6	39.8	0.62	2	2.2	1.9	2.9	50
632-6	0.12	0.97	0.56	0.32	0.93	0.54	0.31	0.89	0.52	0.30	895	53.7	50.9	43.2	0.60	2.3	2.2	2.1	2.8	50
711-6	0.18	1.11	0.64	0.37	1.06	0.61	0.35	1.02	0.59	0.34	905	63.0	61.6	55.4	0.67	2.15	2.4	2	3.5	52
712-6	0.25	1.56	0.90	0.52	1.49	0.86	0.50	1.43	0.83	0.48	885	62.6	62.0	55.8	0.67	2.05	2.3	2.05	3.2	52
713-6	0.37	2.32	1.34	0.77	2.22	1.28	0.74	2.13	1.23	0.71	890	65.4	64.4	58.2	0.64	2.3	2.5	2.3	3.4	54
801-6	0.37	2.06	1.19	0.69	1.97	1.13	0.66	1.89	1.09	0.63	920	68.1	67.7	62.2	0.69	1.95	2.25	1.8	3.7	56
802-6	0.55	2.74	1.59	0.91	2.62	1.51	0.87	2.51	1.45	0.84	920	72.5	73.0	69.3	0.73	2.25	2.45	2.05	4.3	56
803-6	0.75	3.65	2.11	1.22	3.49	2.01	1.16	3.34	1.93	1.11	910	72.9	74.2	71.3	0.74	2.2	2.4	2.1	4.1	58
90S-6	0.75	3.83	2.22	1.28	3.67	2.11	1.22	3.52	2.03	1.17	920	72.5	73.3	70.0	0.71	1.8	2.2	1.7	4.1	59
90L1-6	1.1	5.47	3.17	1.82	5.23	3.01	1.74	5.01	2.90	1.67	910	73.5	75.2	72.9	0.72	1.95	2.25	1.85	4.2	59
90L2-6	1.5	7.12	4.12	2.37	6.81	3.92	2.27	6.53	3.78	2.18	900	74.7	77	75.5	0.74	2.1	2.3	1.9	4.2	60
100L1-6	1.5	6.77	3.92	2.26	6.47	3.72	2.16	6.20	3.59	2.07	935	78.5	79.9	78.2	0.74	2.05	2.35	1.8	5	61
100L2-6	2.2	9.87	5.71	3.29	9.44	5.43	3.15	9.04	5.23	3.01	950	77	78.4	77.8	0.76	2.2	2.2	1.3	6	63
112M-6	2.2	9.3	5.38	3.10	8.89	5.11	2.96	8.52	4.93	2.84	925	79.2	81.8	81.7	0.78	1.9	2.25	1.75	4.7	64
112L-6	3	12.9	7.49	4.31	12.4	7.12	4.13	11.9	6.86	3.95	950	79	80.9	80.9	0.77	2.2	2.2	1.3	6	64
132S-6	3	12.5	7.22	4.16	11.9	6.86	3.98	11.4	6.61	3.81	955	82.5	84.5	84.3	0.77	1.7	2.15	1.45	5.3	64
132M1-6	4	16.2	9.39	5.40	15.5	8.92	5.17	14.9	8.59	4.95	965	85.2	85.8	84.4	0.76	2.3	2.9	1.6	6.6	68
132M2-6	5.5	21.5	12.4	7.16	20.6	11.8	6.9	19.7	11.4	6.6	960	85.9	87.2	86.8	0.78	2.5	2.7	1.7	6.7	68
132L-6	7.5	30.1	17.4	10.0	28.8	16.5	9.6	27.6	15.9	9.2	960	85	86.4	86.4	0.77	2	2	1.3	6.5	68
160M-6	7.5	30.3	17.6	10.1	29.0	16.7	9.7	27.8	16.1	9.3	970	86.8	87.6	86.7	0.75	2.1	2.7	1.65	6.1	68
160L-6	11	42.5	24.6	14.2	40.7	23.4	13.6	39.0	22.5	13.0	965	87.2	88.6	88.6	0.78	2.25	2.35	1.5	6.9	73
711-8	0.09	0.97	0.56	0.32	0.93	0.54	0.31	0.89	0.52	0.30	680	44.9	39.6	31.1	0.54	2.3	2.6	2.2	2.4	50
712-8	0.12	1.15	0.67	0.38	1.10	0.63	0.37	1.06	0.61	0.35	680	51.7	47.1	38.4	0.53	2.5	2.75	2.5	2.7	50
713-8	0.18	1.51	0.88	0.50	1.45	0.83	0.48	1.39	0.80	0.46	670	55.8	52.5	44.4	0.56	2.3	2.5	2.4	2.8	52
801-8	0.18	1.24	0.72	0.41	1.18	0.68	0.39	1.13	0.66	0.38	705	64.4	61.3	53.9	0.59	2.2	2.65	2	3.6	52
802-8	0.25	1.64	0.95	0.55	1.57	0.90	0.52	1.51	0.87	0.50	700	66.3	64.3	57.8	0.60	2.1	2.5	2.05	3.5	52
90S-8	0.37	2.37	1.37	0.79	2.26	1.30	0.75	2.17	1.25	0.72	690	66.3	65.4	59.6	0.62	1.55	2	1.5	3.2	56
90L-8	0.55	3.26	1.89	1.09	3.12	1.79	1.04	2.99	1.73	1.00	680	69.0	69.9	65.8	0.64	1.6	1.95	1.6	3.3	56
100L1-8	0.75	3.88	2.24	1.29	3.71	2.13	1.24	3.55	2.06	1.18	700	75.2	74.8	70.8	0.68	2.1	2.55	1.95	4.4	59
100L2-8	1.1	5.16	2.99	1.72	4.94	2.84	1.65	4.73	2.74	1.58	685	74.6	76.7	75.1	0.75	1.8	2.15	1.65	4.1	59
112M-8	1.5	7.24	4.19	2.41	6.93	3.98	2.31	6.64	3.84	2.21	700	78.3	78.9	76.4	0.69	2.2	2.5	2.1	4.5	61
132S-8	2.2	10.0	5.81	3.35	9.6	5.52	3.20	9.20	5.32	3.07	705	78.8	80.7	79.6	0.73	1.8	2.25	1.65	4.5	64
132M-8	3	13.0	7.51	4.33	12.4	7.14	4.14	11.9	6.88	3.96	705	80.9	82.6	81.9	0.75	2.1	2.5	1.8	5.1	64
160M1-8	4	18.0	10.4	5.99	17.2	9.88	5.73	16.5	9.53	5.49	710	81.7	83.0	82.0	0.72	1.8	2.25	1.5	4.7	68
160M2-8	5.5	23.4	13.5	7.79	22.4	12.9	7.45	21.4	12.4	7.14	715	84.6	85.7	84.9	0.73	2.15	2.55	1.6	5.2	68
160L-8	7.5	30.3	17.5	10.1	29.0	16.67	9.66	27.8	16.1	9.26	715	85.8	87.1	86.7	0.76	2.15	2.45	1.4	5.4	68